



PCT 2003 / 004730



INVESTOR IN PEOPLE

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 06 JAN 2004

WIPO

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed *Amber*

Dated 12 December 2003

BEST AVAILABLE COPY

FAST TRACK APPLICATION
COMBINED SEARCH & EXAMINATION
01NOV02 E760429-4 C71306
P01/7700 0.00-0225493.6

Request for grant of a patent

1. Your reference

TBS/GIBBS-DG5

2. Patent application number

0225493.6

51 NOV 2002

3. Full name, address and postcode of the or
of each applicant (*underline all surnames*)GIBBS TECHNOLOGIES LTD,
LA MOTTE CHAMBERS,
ST HELEER
JERSEY JE1 1BJ
8443731001

Patents ADP number

If the applicant is a corporate body, give
the country/state of its incorporation

BRITISH VIRGIN ISLANDS

4. Title of the invention

AMPHIBIOUS VEHICLE SUSPENSION

5. Name of your agent (*if you have one*)

T. BAIN SMITH

"Address for service" in the United
Kingdom to which all correspondence
should be sentWICKENS MANOR,
CHARING,
NR. ASHFORD, KENT
TN 27 0DT

Patents ADP number

826822900

6. If you are declaring priority from one or
more earlier patent applications, give the
country and the date of filing of the or each
of these earlier applications and (*if you
know it*) the or each application number

Country

Priority application number Date of filing

7. If this application is divided or otherwise
derived from an earlier UK application,
give the number and the filing date of the
earlier application8. Is a statement of inventorship and of right
to grant of a patent required in support of
this request? (*Answer yes if:*a) any applicant named in part 3 is not an
inventor, orb) there is an inventor who is not named
as an applicantc) any named applicant is a corporate
body

YES

1. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document.

Continuation sheets of this form

Description

Claim(s)

Abstract

Drawing(s)

5

2

1

3

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents (*please specify*)

11.

I/We request the grant of a patent on the basis of this application
Signature

T. Bain Smith

Date

1 November 2002

T.B.

12. Name and daytime telephone number of person to contact in the United Kingdom

T. BAIN SMITH
020 8688 8318

Ref. GIBBS AD65

Patents Form 1/7

DUPLICATE

1

Amphibious Vehicle Suspension

The present invention relates to an amphibious vehicle having retractable road wheels each having a wheel suspension.

5 Such a vehicle is shown in US 5,531,179 (Roycroft et al). In order to improve the marine and road performance, it has been proposed to move the engine slightly forward; and to align the engine transversely as shown diagrammatically in Figure 3 of PCT/GB 01/03493 (Pub. No. WO 02/14092). Such a conformation however results in spatial problems, in that the outer ends of the engine block are very close to the suspension
10 mountings.

An amphibious vehicle according to the invention has a body, retractable road wheels mounted to the body and arranged to be moved from a lower road engaging position in a land mode to an upper faired position in a marine mode, at least one of the road wheels having a wheel suspension, the suspension comprising a suspension member
15 having a bearing for supporting the wheel, the suspension member being connected to the body by at least one upper link and one lower link, the bearing being ahead of any connection of the or each lower link with the vehicle body.

A McPherson type suspension strut could act as an upper said link, because it locates the suspension member carrying the wheel bearing.

20 Preferably, the bearing is also ahead of any connection of the or each lower link with the suspension member.

The wheel may have an asymmetric rim profile, as opposed to a symmetrical motorcycle wheel; in which case, the upper link(s) and lower link(s) support said wheel only on that side of the wheel which faces the vehicle.

25 The upper link(s) and lower link(s) may extend substantially transversely across the vehicle; again, in opposition to a motorcycle leading or trailing link suspension, where such links would extend substantially along the vehicle.

The suspended road wheel may longitudinally overlap at least one of the connections of a lower link to the vehicle body; and if driven, may also longitudinally
30 overlap the vehicle engine.

At least two of the road wheels may each have a wheel suspension, the suspension comprising a suspension member having a bearing for supporting the wheel, the suspension member being connected to the body by at least one upper link and one lower

D65 01/11/02

0051623 01 Nov 02 06:31

2

link, the bearing being ahead of any connection of the or each lower link with the vehicle body.

Preferably, the driven wheel(s) driven by a drive shaft or shafts have their shaft bearing(s) ahead of the lower link connections to the vehicle body. In an amphibious vehicle having at least four wheels, preferably all the road wheels, or all of the driven wheels, are mounted to the vehicle's body with their bearings ahead of the or each lower link connection to the vehicle body.

In a particularly advantageous embodiment, at least one of the lower suspension links is a track control arm.

The arrangement described may be found particularly suitable to a planing vehicle with a mid-mounted transverse engine, due to the hull shape and mechanical layout of such a vehicle. The weight distribution offered by a mid-mounted engine assists planing on water.

The arrangement described also allows a particularly robust mounting for a strut actuator for a retractable suspension, which mounting must withstand retraction and deployment loads as well as normal suspension loading. Should this suspension layout be used in conjunction with the transmission layout of our co-pending application GB02.....(filed herewith), the contents of which are incorporated herein by means of reference, so that the outer CV joint on the or each driveshaft is a plunging joint; the separation of the mountings to the suspension member of the suspension links and of the driveshaft may be advantageous in packaging the bulky plunging CV joint.

An embodiment of the invention will now be described by way of example with reference to the accompanying drawings in which:-

Figure 1 is a diagrammatic plan view of an amphibious vehicle according to the invention;

Figure 2 is a perspective view of a rear suspension for the vehicle of Figure 1 as seen from the inside of the vehicle looking outwards, and for clarity not showing the road wheel; and

Figures 3 and 4 are respectively a diagrammatic plan and elevation of a front suspension for the vehicle of Figure 1.

D45 01/11/02

0051622 01 Nov 02 06:31

In Figure 1, there is shown an amphibious vehicle 1 having body 3, and a mid-mounted transverse engine 4 arranged to drive through transmission 6 a marine drive means, such as a pump jet 8; and via drive shafts 10, rear road wheels 12. The rear road wheels have suspensions 14, which have suspension links 16; which will be described with reference to Figure 2. The front road wheels 13 have suspensions 15, which have suspension links 17.

Figure 2 shows an upright suspension member 20 having an upward extension 22, and a bearing 24 for supporting one end of drive shaft 10 on the inside; and the wheel on the outside. Member 20 also has connection points for suspension links 16, as will be described below. A disc brake caliper (not shown) is secured to the suspension member at points 26.

Connected between the body of the vehicle and a member 20 are upper links 28 and 30 which connect to extension 22 at 32. Lower links 34 and 36 connect the lower part of member 20 at 38 to the body of the vehicle. It will be noted that the connections between links 34 and 36 and member 20 are behind drive shaft 10. A track control arm 40 also connects between the lower part of member 20 and body 3 (fig. 1).

In order to retract the road wheel into the body of the vehicle, a cylinder 42 is connected to the body by means of trunnions 44. A piston rod 46 acts between cylinder 42 and lower part of member 20 at point 48.

It will be seen that drive shaft 10 and bearing 24 are ahead of any connection of lower links 34 and 36 between the body of the vehicle and the suspension member. This ensures that there is no difficulty in finding room for the engine 4 and suspension connection points to body 3 of the vehicle.

Figures 3 and 4 relate to the front wheels, which are also retractable and which are steerable; these each have a bearing 25 on the outside of suspension member 21. Numeral 27 represents the central axis of bearing 25; which is ahead of any connection of both lower links 35 and 37, together forming a wishbone between the body 3 of the vehicle and suspension member 21. An upper wishbone having links 29 and 31 connects with an upward extension 23 of suspension member 21 and the body 3. It will be noted that as shown, the front of body 3 is swept up to present a good hydrodynamic profile on water; reducing the amount of chassis space available for lower suspension mountings in front of the centre of rotation of the wheel.

It may also be seen from figure 3 that the rim profile 33 of wheel 13, which is shown in section, is an asymmetric profile, as commonly used in car wheels; and that the upper and lower links support wheel 13 only on that side of the wheel which faces the vehicle.

5 It will be appreciated by those skilled in the automotive engineering art, that a "connection" between two components may in fact comprise several other components, e.g. a bolt, nut, and washers; which may have a significant length. For clear understanding of the claims, the term "connection" should be understood as the plane in which two adjacent components meet.

10 It will also be understood that where opposite ends of a suspension link are attached to other components in planes at right angles to each other, it cannot be determined whether one plane is ahead of the other, as the planes intersect. In this case, the mounting positions may be compared by defining a plane at one end of the link as passing through the longitudinal centre line of a connecting element such as a bolt or stud.

15 It should also be noted that for clarity, figures 3 and 4 do not show components such as the wheel hub and brake which would be needed to complete the wheel mounting arrangement.

An advantage of the present arrangement of the lower wishbone 35/37 being behind the centre of rotation of each front road wheel 13 relates to vehicle dynamics.
20 Vehicle weight ahead of the front wheels is reduced, which may improve steering response. Where the amphibian is designed for off road driving on land – for example to allow it to reach water – it is possible to keep vehicle front overhang to a minimum, so as to reduce grounding by improving the ramp angle. (The front ramp angle being defined, particularly for off road vehicles, as the angle to the horizontal of a line drawn as a tangent
25 to the front wheel to the foremost part of the vehicle) Furthermore, the wheelbase is able to be made as long as possible in proportion to the vehicle's total length. A yet further advantage is that in the case of the vehicle of Figure 1, where the vehicle narrows towards the front, it is possible to ensure that the lower wishbones can be kept as low as possible to provide a stable support system to each front wheel.

30

It will be appreciated that further modifications to the suspension layout may also be made as required without departing from the spirit and scope of the invention. In particular, it may be found convenient to apply such a suspension to a vehicle with four or

5

5 more driven wheels; and to use for example a McPherson strut suspension system, as opposed to the upper wishbone layout described and illustrated. The layout of suspension arms and locations shown is of course applicable to suspensions using a range of spring media, for example coil springs, air or hydraulic springs, or simple or compound torsion bars; with and without further accessories such as anti-roll bars. Various suspension retraction mechanisms may be used to convert the vehicle from road mode to marine mode and vice versa, as are known in the amphibious vehicle art.

The term "body" may be taken to mean an open frame, a monocoque, or any other enclosure.

10

D65 01/11/02

6

CLAIMS

1. An amphibious vehicle having a body, retractable road wheels mounted to the body and arranged to be moved from a lower road engaging position in a land mode to an upper faired position in a marine mode, at least one of the road wheels having a wheel suspension, the suspension comprising a suspension member having a bearing for supporting the wheel, the suspension member being connected to the body by at least one upper link and one lower link, the bearing being ahead of any connection of the or each lower link with the vehicle body.
2. An amphibious vehicle according to claim 1, characterized in that the bearing is also ahead of any connection of the or each lower link with the suspension member.
3. An amphibious vehicle according to claim 1 or claim 2, characterized in that the wheel has an asymmetric rim profile, and the upper link(s) and lower link(s) support said wheel only on that side of the wheel which faces the vehicle.
4. An amphibious vehicle according to any of the above claims, characterized in that the upper link(s) and lower link(s) extend substantially transversely across the vehicle.
5. An amphibious vehicle according to any of the above claims, characterized in that the road wheel longitudinally overlaps at least one of the connections of a lower link to the vehicle body.
6. An amphibious vehicle according to any of the above claims, characterized in that at least two of the road wheels each have a wheel suspension, the suspension comprising a suspension member having a bearing for supporting the wheel, the suspension member being connected to the body by at least one upper link and one lower link, the bearing being ahead of any connection of the or each lower link with the vehicle body.

D63 01/11/02

0051623 01 Nov 02 06:31

7

7. An amphibious vehicle according to any of the above claims, characterized in that the driven wheel(s) driven by a drive shaft or shafts have their shaft bearing(s) ahead of the lower link connection(s) to the vehicle body.
- 5 8. An amphibious vehicle according to any of the above claims, characterized in that the driven road wheel(s) longitudinally overlap the vehicle engine.
9. An amphibious vehicle according to any of the above claims, characterized in that the vehicle has at least four road wheels, all of which wheels are mounted to the vehicle's body with their bearings ahead of the or each lower link connection to the vehicle body.
- 10 10. An amphibious vehicle according to any of claims 1 to 8, characterized in that the vehicle has at least four road wheels, and in that all of the driven wheels are mounted to the vehicle's body with their drive shaft bearings ahead of the or each lower link connection to the vehicle body.
- 15 11. An amphibious vehicle according to any of the above claims, characterized in that at least one of the lower suspension links is a track control arm.
- 20 12. An amphibious vehicle according to any of the above claims, characterized in that the vehicle is a planing vehicle with a mid-mounted transverse engine.
13. An amphibious vehicle according to any of the above claims, characterized in that a suspension upper link comprises a suspension strut.
- 25 14. An amphibious vehicle substantially as described with reference to any one or more of Figures 1, 2, 3, or 4 of the accompanying drawings.

D6301/1/02

0051623 01 Nov 02 06:31

8

ABSTRACT


Suspension for amphibious vehicle

(figs. 1, 2)

Amphibious vehicle 1 comprises body 3 and retractable road wheels 12, 13. At least one wheel suspension 14, 15 comprises member 20 having bearing 24 supporting a wheel, member 20 being connected to the body by at least one upper link 28, 30, and at least one lower link 34, 36; the bearing being ahead of any connection of lower link(s) with the vehicle body. The bearing may also be ahead of any connection of the lower link(s) with the suspension member. A track control arm 40 may be provided. This arrangement may allow engine 4 to be mounted close to rear driveshafts 10, giving suitable weight distribution for a planing vehicle. The arrangement may also be applied to front and/or non-driven wheels (figs. 3, 4). Hydraulic suspension strut 42 may be used to retract the suspension, pivoting around trunnion mount 44; a strut may act as an upper suspension link.

2/3

FIG 2

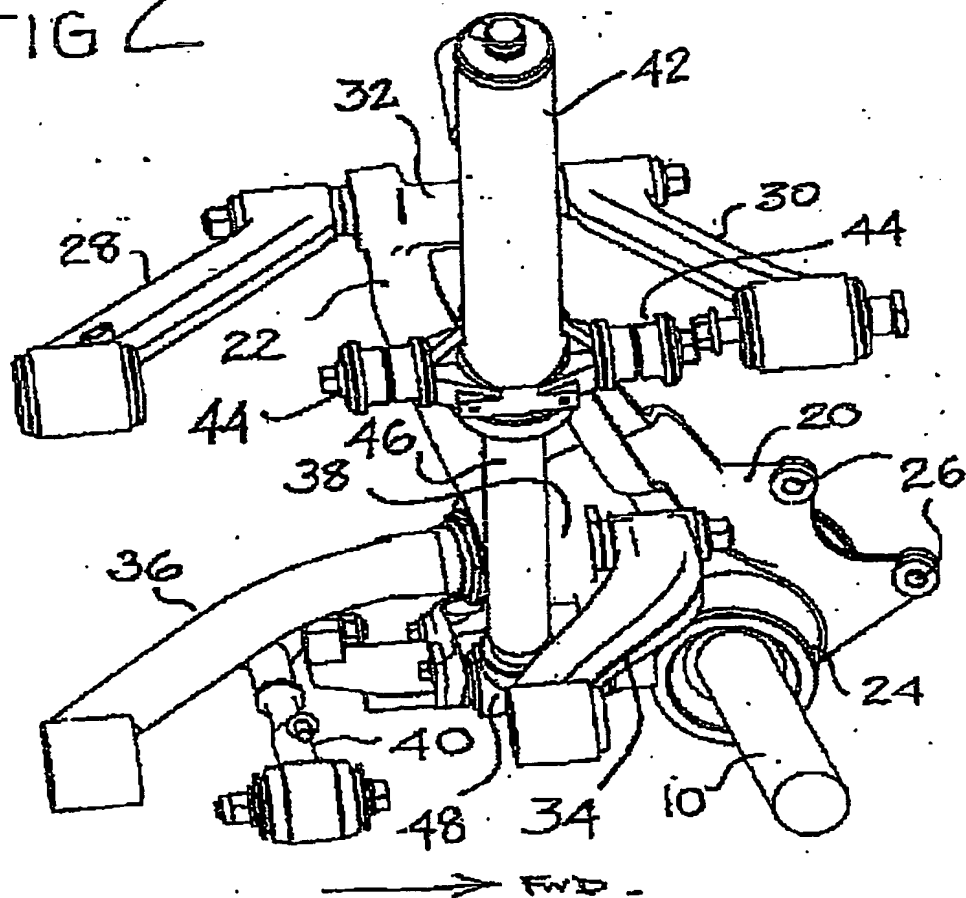

3/3

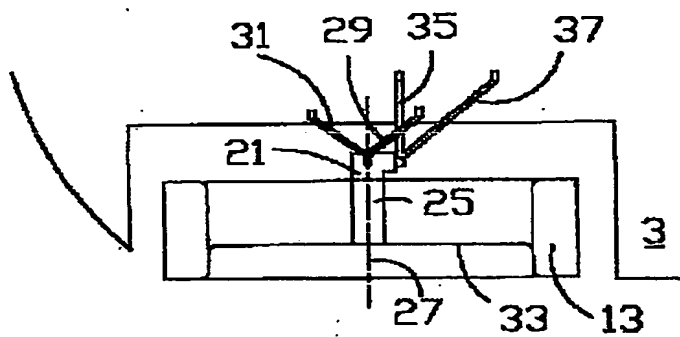


Fig. 3

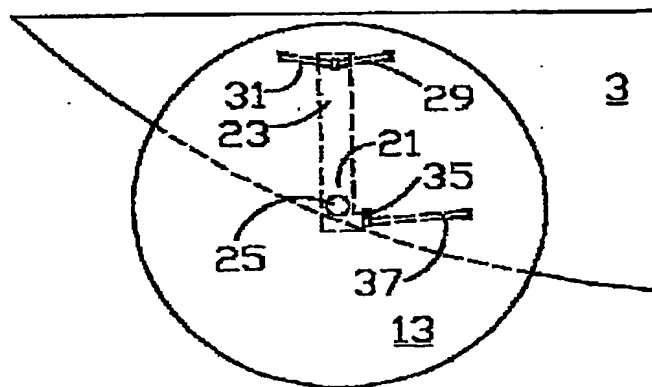


Fig. 4

PCT Application
GB0304730



This Page is inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ BLACK BORDERS

☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☒ FADED TEXT OR DRAWING

☒ BLURED OR ILLEGIBLE TEXT OR DRAWING

☒ SKEWED/SLANTED IMAGES

☐ COLORED OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☐ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images
problems checked, please do not report the
problems to the IFW Image Problem Mailbox**